




Specification


LED SMD P10 Full Color
LED Screen Size : 4,80m x 2,88m (tinggi x lebar)
LED MODULE SPECIFICATIONS
Pixel Pitch : 10mm
Pixel Configuration : 1R1G1B
Module Resolution: 32x16
Module Pixels :512 pixels
Module size: 320mmx160mm
Driving Method : 1/4 scanning
Driving IC brand : MBI 5124
CABINET SPECIFICATIONS
Cabinet Size (WXHxD) : 15pcs 960mmx960mmx140mm
Cabinet Resolution (dots): 96x96dots
Power supply : CHUANGLIAN
Cabinet Pixels : 9.216 dots
LED type : SMD3535
Material : STEEL
Weight (per cabinet): 47 Kg/cabinet
LED Modules Qty : 3X6= 18 pcs
LED SCREEN PARAMETER
LED Screen : W4,80m*H2,88m =13,824 sqm
Screen Resolution : 480*288dots
Cabinet Quantity : 15 pcs
Pixel density (dots/sqm) : 10.000/sqm
Brightness : ≥ 6500cd/m ²
View Angle : 140 degree (horizontal) 140degree (vertical)
View Distance : 10m- 100m
Gray Scale : 14bits input, correction with 16bits
Display Color : 16.7 M
Brightness Adjustment : 0-100 levels
Operation Power : AC 100-240V 50-60HZ Switch- able
Maxim Power Consumption : 880 W/m ²
Average Power Consumption : 350W/m ²
Frame Update Frequency : 60-75HZ
Screen Refresh Frequency : 960-2000Hz
Gamma Correction : -5.0- 5.0
Support Input : Composite Video, S- Video, DVI, HDMI., SDI, HD_SDI
Control Distance : Ethernet cable 100m, optical fiber 5km
Support VGA Mode : 800x600,1024x768,1280x1024,1600x1200
Color Temperature : 5000-9300 adjustable
Brightness Correction : dot by dot, module by module, cabinet by cabinet
Operating Temp. : -20-60 Celsius degree
Operating Humidity : 10-95% RH
Operating Life : 100,000 hours
MTBF : 5000 hours
Continuous Working Time : ≥48 hours
Protection Level : IP65 Waterproof
Out of Control Pixel Rate : 0.01%

P10 - OUTDOOR VIDEOTRON OUTDOOR



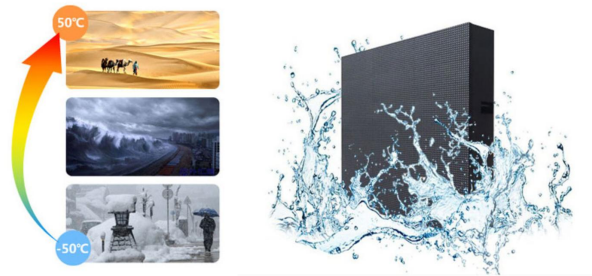

IP65 Protection Level



High Brightness, Excellent Image Video



Energy Saving

Outdoor Fixed LED Display

- High Quality LED Screen for Outdoor Application
- Customized Size as Customer's Requirement
- SMD 3 in 1 LED Encapsulation Technology
- CE,Rohs Approved



More Features



CONTRAST



MODULAR



LOW NOISE



24/7
OPERATION



COLOR



EASY
INSTALL



WIDE VIEW



SCALABLE